

The one that creates a new trend

● POS terminals - AnyShop



AnyShop

High-performance POS system that's adaptable to every business need

The AnyShop is a standalone/wall-mountable panel POS system with advanced features and powerful functions. It includes inbuilt speakers, as well as a monitoring camera for complete control over every transaction that your system handles. The choice of either the Intel Atom or Intel Core 2 Duo processor allows for flexibility of the POS system's nature. Designed with longevity and maintenance in mind, the AnyShop's hard disk can be easily inserted or removed in one simple motion, as well as any optional peripheral devices. The intuitive I/O connection panel hides all of the device cables neatly underneath the system's base, simplifying and managing the whole POS area. Its clean shape and chic color system let it blend perfectly into its surroundings, whatever they may be.




- Choice of Intel Core 2 Duo or Atom processor
- Wall-mountable or standalone, easy to install
- Optional stereo speakers and built-in camera
- High-tech cooling system
- Optional extras install with ease
- Available in a variety of colors



AnyShop Any Space


Designed with user's requirement in mind, AnyShop provides a smart solution for any counter where space is premium. With its wall mounting fixture, AnyShop can be easily mounted in any location. The system will be an absolutely perfect solution for any daily and space saving required environment including hospitality, retail, entertainment, health care and other sectors.

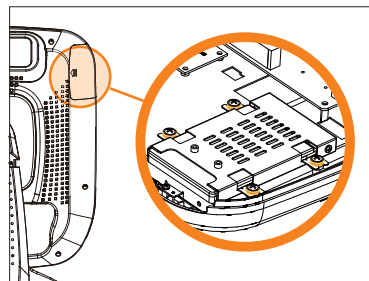

Enhanced Stability HDD Bracket


Anti-Vibration Rubber absorbs subtle vibrations that can lead to Hard Disk damage, thus lengthening the life-cycle and increasing stability.

What's Special?



Power cooling system design

The air came into the system to be completely discharged immediately after circulating CPU; the most heat generator and each effective system heat sink. Also the specialized duct system blocks any flow back heat to the system. With this smart cooling guarantee stable performance and long life span.




External Power Supply Unit

Having the power supply unit externally gives the product its lightweight design, as well as minimizing heat produced internally. If the PSU needs changing, simply attach another one without the hassle of disassembling the entire changing, simply attach another one without the hassle of disassembling the entire unit.



Simplified maintenance

Removable slide-in HDD (screw-free)



The best price performance ratio. More affordable choice with Intel Atom processor



Different colors available

Just clip on/off to customize your POS



AnyShop



Camera (optional)

- Shop security
- Video conferencing



Customer display

- VFD type
- 20 columns x 2 lines



2nd LCD display

- 12.1" 2nd LCD monitor
- 1024 x 768 resolution



**Magnetic Stripe Reader (MSR)
Smart Card Reader(SCR)**



Stereo speakers

Specification



	AnyShop P	AnyShop D5
CPU	Intel Core 2 Duo processor	Intel Atom processor D525 (1M Cache, 1.8 GHz, Dual Core for Pineview D)
Chipset	Intel 945GME	ICH8M
Storage	SATA HDD 2.5inch (Default 320GB)	
Memory	DDR2 SODIMM x 2 slot 1GB (MAX. 3GB)	DDR3-800 SODIMM x 1 slot 2GB (MAX. 4GB)
VGA	Intel 82945GM GMCH (Independent dual display)	Intel Gen3.5+GFX Render Core 400MHz (Pineview-D)
Display	15" TFT LCD with 5-wired resistive Touch Screen 1024 x 768 resolution	
Internal I/O		
USB	3 Ports (reserved for Touch controller, SCR EMV card, Camera, MSR controller)	
PS/2	1 Keyboard with pin header	
RS-232	COM 4 reserved for CDP COM 3 with 9pin header	COM 5 & 6 with 9pin header
VGA	Reserved for 2nd display (15pin Header, Shared with external D-SUB port)	
Extension	Mini PCI	Mini PCIe
LVDS	24bit LVDS	
External I/O		
Parallel	1 Port	
USB	Rear 2, Side 2	
PS/2	Mouse 1 / Keyboard 1	
RS-232	COM 1 - 2 with + 5/12V power output on 9pin	COM 1 - 3 with + 5/12V power output on 9pin
LAN	GbE LAN	
VGA	-	Reserved for 2nd display (Shared with internal 15pin Header)
Speaker	2 x 0.8W (Stereo)	
Audio	Line-out / Line-in / Mic	
Options		
MSR	Comply with ISO 7811, Support 1 & 2 & 3 track	
SCR	EMV level	
Camera	Camera	
Dallas	Dallas I-button reader	
Customer display	VFD type (20 x 2)	
2nd LCD	12.1" LCD : 1024 x 768 resolution	
C.D	-	Cash drawer port
DVR	DVR Card : 4channels support	-
WiFi	Mini PCI for wireless LAN	Mini PCIe for wireless LAN
VGA	Mini PCI for VGA card	-
Qualification	CE, FCC, KC, CCC, CB	
Power	Adaptor 12V, 5A	
OS Support	Windows XP/XPE/7, POSReady 2009/7, Linux, WEPOS	
Dimension (WxHxD)	385 x 395 x 265(mm)	



* Product specifications may differ according to region and may be changed without prior notice.